







## HYDRONIC M-II

Eberspaecher's Hydronic M-II series is powerful, compact, lightweight, and rugged in design. This makes this series of heaters the ideal solution for providing engine, fuel, and hydraulic preheat for off-highway equipment as well as engine and supplemental cabin heat for motorcoachs, school buses, and boats. The Hydronic M-II series of heaters is available in one size with the option of four power levels and are diesel or bio-diesel compatible. Units can be boxed for protection against the elements and incorporate an automatic altitude compensation component, so you can use your heater anywhere with ease.

### FEATURES AND BENEFITS OF THE HYDRONIC M-II

- Output control in small increments
- Ceramic glow pin
- Electrically commuted motors for combustion air, fan, and water pump
- Heater can be mounted in different positions and angles for installation flexibility
- Biodiesel-compatible (Hydronic M-II 8 unit only) up to 100%
- EPA verified and CARB compliant for use anywhere in North America
- Automatic altitude compensation

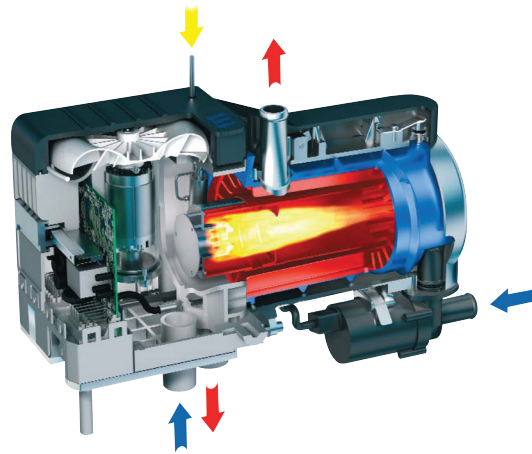

TECHNICAL DATA		Hydronic M-II 8	Hydronic M-II 10	Hydronic M-II 12
Heat Output (kW/BTU)	High	8.0 / 27300	9.5 / 32437	12 / 42000
	Low	1.5 / 5120	1.5 / 5120	1.2 / 4100
Fuel Consumption (L/hr/Gal/hr)	High	0.9 / 0.24	1.2 / 0.32	1.5 / 0.40
	Low	0.18 / 0.05	0.18 / 0.05	0.15 / 0.04
Power Consumption at 12V (amps)	High	4.6	7.2	11
	Low	2.9	2.9	2.8
Weight (kg/lbs)			6.2 / 13.7	